PRE-RIG TRUSS

Low Pro




Low Pro

The **Litec Low Pro** is the smart choice for professionals seeking compactness, strength and flexibility in one solution.

With a 61 cm width and multiple lengths, it delivers maximum versatility in minimal space.

Designed as a pre-rig truss, it streamlines conventional and moving lights management. Its innovative cart features variable height, folds flat and reduces storage volume.

Chords A	Diagonals B	Ends C	Lighting Bar D	Connection system
Extruded tube Ø50.8 × 4.76 mm EN AW-6082 T6	Extruded tube Ø25.4 × 3.17 mm EN AW-6082 T6	Steel fork connector galvanized 11SMn37	Extruded tube Ø40 × 40 × 3.17 mm EN AW-6082 T6	CPK16 16 mm galvanized pin + safety R-clip

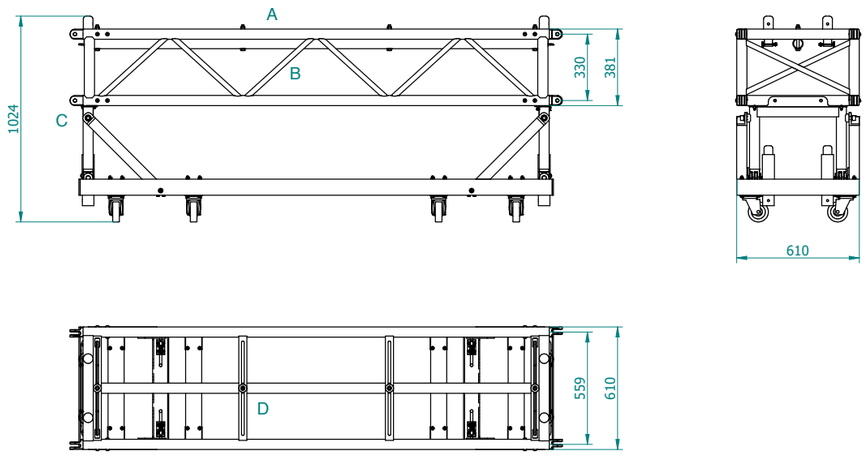



KEY FEATURES

- Rotating forks
- Height adjustable
- Stackable design - both for individual dollies and for complete systems with lights

TRUSS CODE		
Code	**W × H × D (cm)**	**kg**
LPT2400	62.06 × 44.55 × 245	57

Low Pro is currently supplied in a single model.
Other lengths available on request.

Connection

PRE-RIG Truss **Low Pro**

Forks connect using a steel pin.



CPK16

16 mm steel connection pin
with 3 mm safety clip


Corner gates


Coupling modules available in different lengths to achieve a wide range of angles. In addition to the models listed here, alternative versions are available, and custom designs can be produced to match your stage requirements.

LOW PRO PRERIG GATE

2 WAY 60°

Connects two horizontal truss to form a 60° angle.



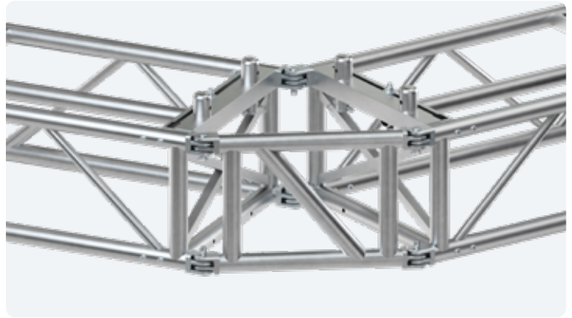

Code	W × D × H (cm)	Kg
LP04	60.88 × 38.02 × 5	6


2-way gate 20°

LOW PRO PRERIG LINK

HINGED JOINT


Two-wing joint with central pin allowing vertical truss movement.



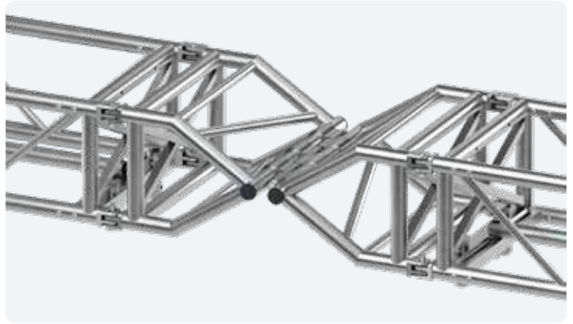

Code	W × D × H (cm)	Kg
LP1000ADJ	105 × 64.08 × 38.02	26.5

Hinged joint

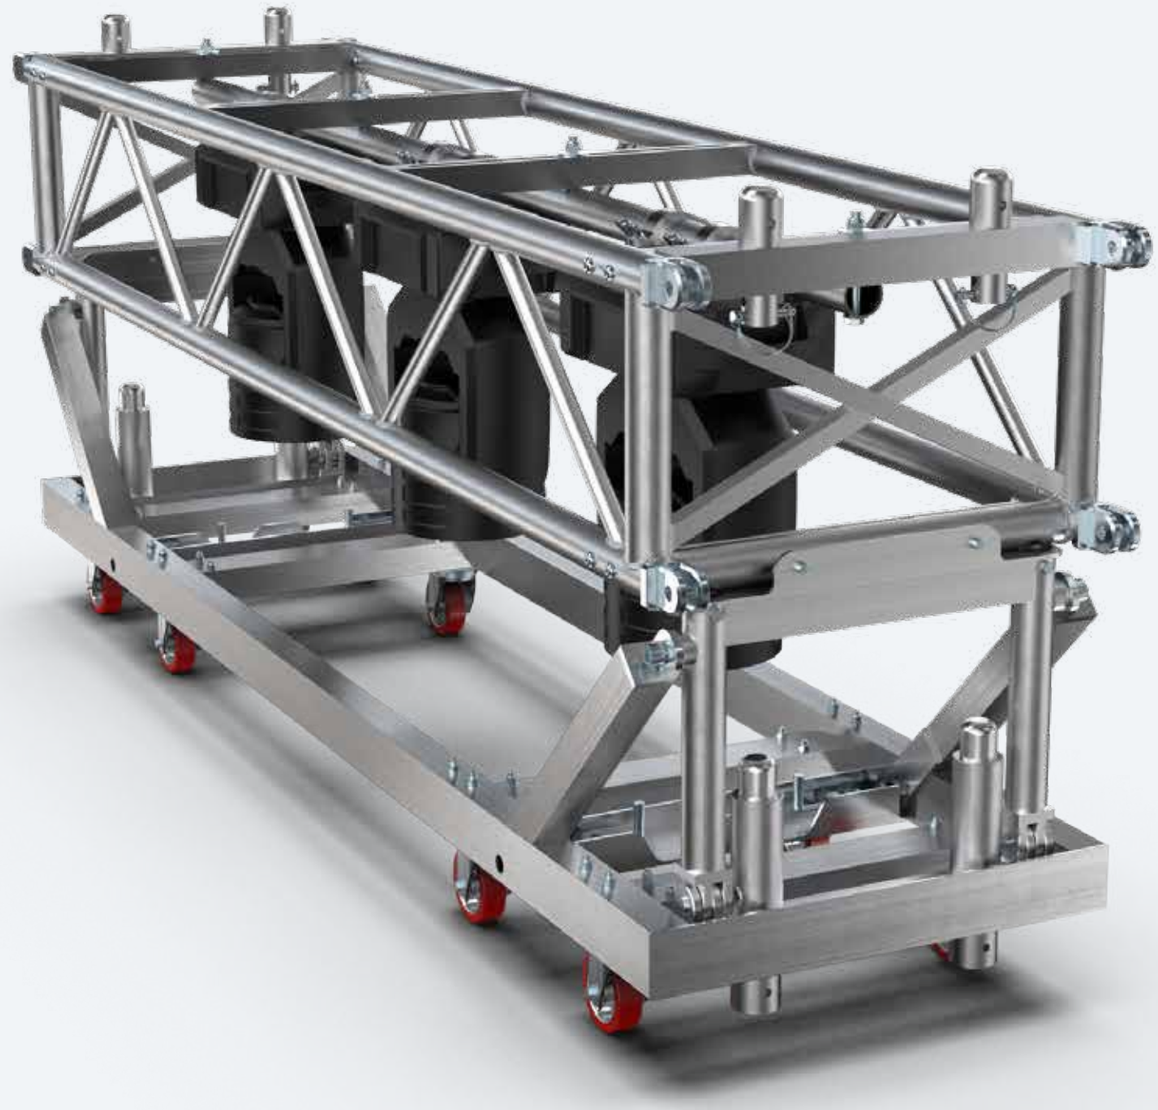


Dolly

Durable 8-wheel swivel dolly, fully foldable and easily stackable.
Designed for maximum versatility, ready to go when needed and compact when stored.



DOLLY CODE		
Code	**W × H × D (cm)**	**kg**
LPD2400	61.04 × (63.13 - 88.53) × 236.12	64

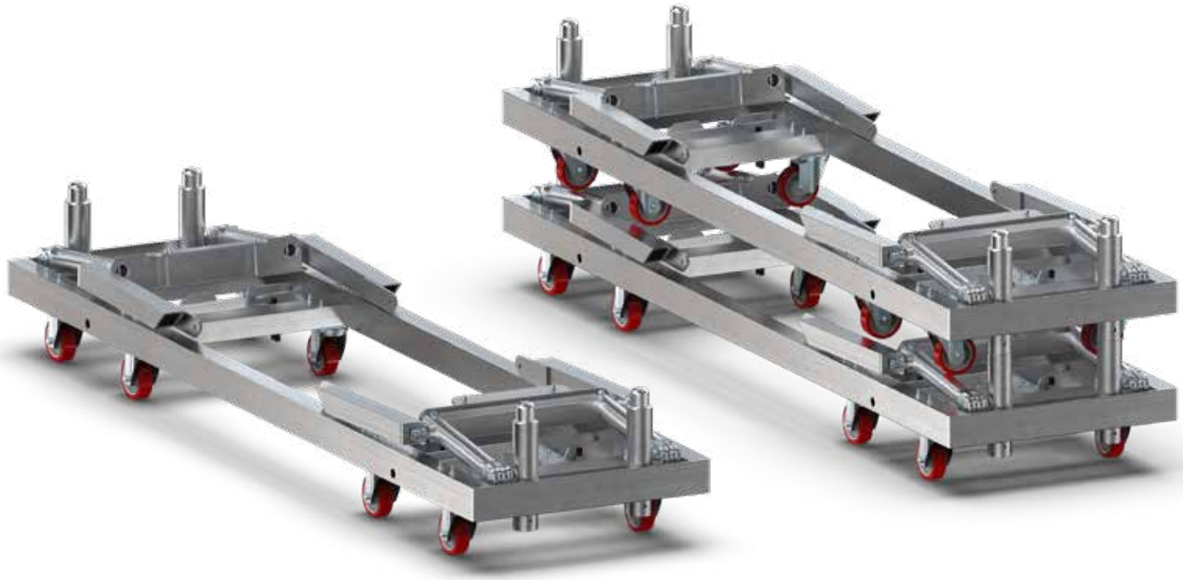

Stackable option

PRE-RIG ***LOW PRO***

Two pre-rig Low Pro modules can be easily stacked for handling and storage.
Stacking two complete pre-rig systems with mounted fixtures may become unstable during handling. For safe operation, the two systems must be secured together with ratchet straps.

